


Instructions:

Cut along the outer line. Place this template over the dial (page 2) and press brass fastener or thumb tack through center dot on both dials.



Author: Cheri Montgomery
Permission to print granted by author

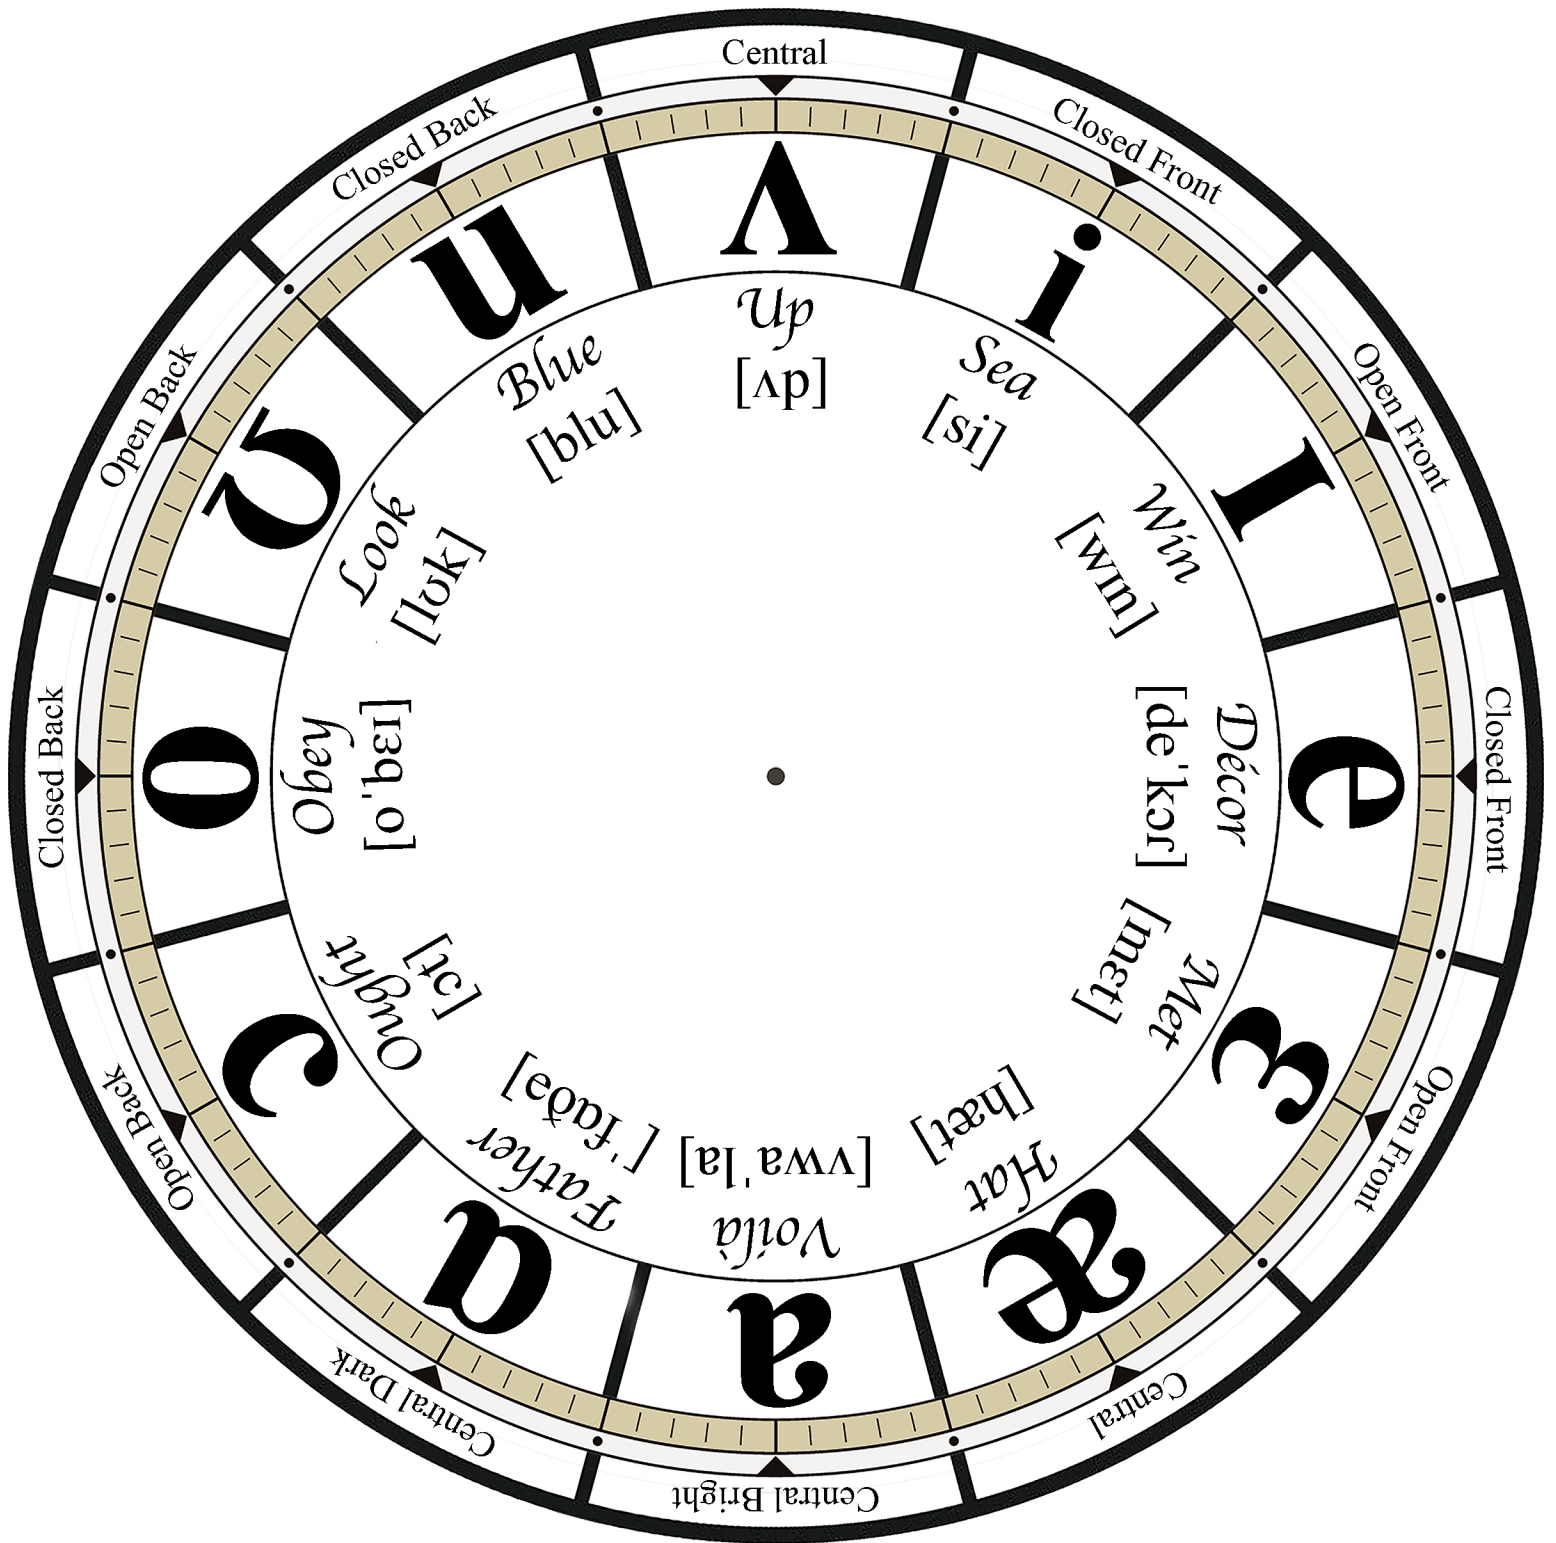

Author: Cheri Montgomery
 Permission to print granted by author